

# BETA XL

THE OFFSET ALLROUNDER

Durable and flexible. The ideal companion for the professional operator.

The classic all-round mulcher with mulching door for quick removal of cutting waste to increase production speed. Precise and controllable mulching due to large displacement and tilt angle. Most suitable for daily maintenance of sloping grounds and vertical vegetation by farmers, growers, contractors and municipalities.



## Multifunctional

Integrated mulching door for changing between mowing and mulching

## Ultra strong

Double walled for extra wear resistance

## Protected



Safety valve, flow control, tilt protection and gearbox protection

## Reach

+90° to -65° works aside / behind tractor

## Stable


Boom arms made of oversized steel profile with high rigidity

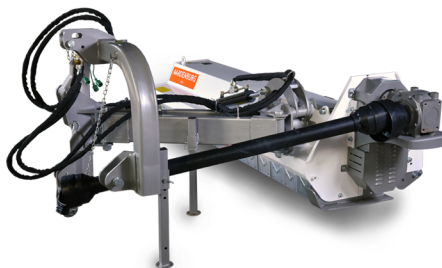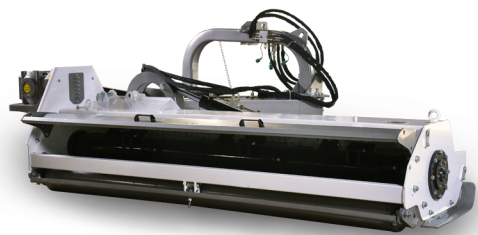

## Specifications

| Models  | Weight kg | Working width mm | Power demand HP | Attachment  | PTO RPM | Drive system | Tool pieces | Rotor diameter mm | Total diameter mm | Reach right mm | Reach left mm | Extended right mm | Extended left mm | Reach rearward mm | Reach inclined mm | Cutting power mm |
|---------|-----------|------------------|-----------------|-------------|---------|--------------|-------------|-------------------|-------------------|----------------|---------------|-------------------|------------------|-------------------|-------------------|------------------|
| XL 1800 | 695       | 1800             | 70              | CAT II      | 540     | 4 V-belt     | 16          | 173               | 433               | 1842           | 470           | 1660              | 2625             | 1842              | 1660              | 60-70            |
| XL 2000 | 780       | 2000             | 75              | CAT II, III | 540     | 5 V-belt     | 20          | 173               | 433               | 1842           | 500           | 1860              | 2895             | 1842              | 1860              | 60-70            |
| XL 2200 | 815       | 2200             | 80              | CAT II, III | 540     | 5 V-belt     | 24          | 173               | 433               | 1842           | 500           | 2060              | 3095             | 1842              | 2060              | 60-70            |
| XL 2400 | 850       | 2400             | 90              | CAT II, III | 540     | 5 V-belt     | 24          | 173               | 433               | 1842           | 500           | 2260              | 3295             | 1842              | 2260              | 60-70            |

## Spare parts / Options

|         |                                                                                     |  |
|---------|-------------------------------------------------------------------------------------|--|
| Hammer  | 1100 g                                                                              |  |
|         |  |  |
| Y-blade | 1 piece / 530 g                                                                     |  |
|         |  |  |



 +31 6 40 74 20 13  
 sales@aardenburg1974.nl  
 www.aardenburg1974.nl  
 Valkseweg 46-01, 3771 RE Barneveld, Nederland

AARDENBURG1974.nl